



600W to 1000W  
AWMT- 5000LC® series



### Features

- L-band Tx and Rx interface
- Easy to install and operate
- Compact light weight design
- Weatherproof package
- Phase-locked LNB
- Low phase noise
- Remote Monitor & Control (RS-232 and RS-485)
- Relay alarm indicators
- LED status indicators
- Automatic high reflected power protection
- Harmonic Filter
- High stability internal 10MHz reference
- Downloadable PC GUI
- Redundant operation ready

### Overview


The Advantech range of transceivers uses the latest technology, local and remote control thus providing the ultimate in performance and user friendly operation at a very competitive price.

AWMT-5000LC® is a family of hub-mount transceivers operating in the C-band from 600W to 1000W. These transceivers are designed for continuous operation in the harshest outdoor environment. The built-in microprocessor controller provides for external monitoring and control of the operating parameters, and for the redundancy control. The LNB is connected to the transceiver with a single coaxial cable. Apart from the LNB, the complete unit is available in a single integrated package.

The flexible and comprehensive monitor and control features on the transceiver ensure that it will fit into any network management system architecture. The user-friendly RS-232 interface will provide full set-up and fault monitoring facilities via a PC terminal mode communication or a hand-held terminal. The RS-485 interface will provide functional remote Monitor & Control, using the Graphic User Interface (GUI) or the Monitor & Control Panel.

### Application

The AWMT-5000LC® is designed to operate in the C-band with L-band interface. The unit is self-contained and is intended for mounting outdoors, close to the OMT of an antenna.

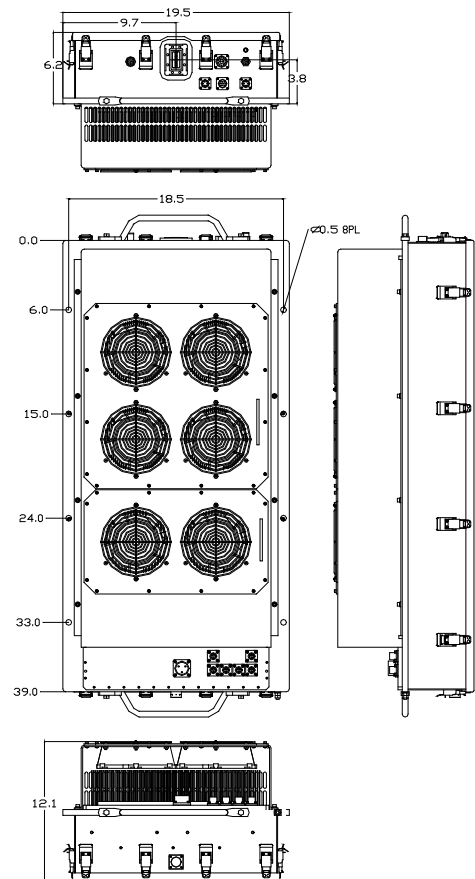

### Options

- Extended C-Band (5.85 – 6.725 GHz)
- LNA operation
- Remote M&C panel (Ethernet port optional)
- External 10 MHz reference with auto sensing

### Accessories

- Mounting kits for transceiver installation
- Redundancy kits
- Mounting frame for redundancy applications
- Transmit Reject Filter and/or Receive Reject
- Filter (external)
- Remote Control Panel
- Hand-Held terminal

### Redundancy

The AWMT-5000LC® series of transceivers may be configured to operate in 1:1 redundancy mode. No extra controller is required for redundancy operation, as the built-in controller in each amplifier provides this function. Redundancy kits are required for redundant operation.

# C-Band Transceiver L-Band IF Interface

## Technical Specifications

### Transmit Path

Model	600W	700W	800W	1000W
P1dB min. (dBm)	+ 57	+ 57.5	+ 58	+ 59
Gain min @ max. gain set (dB)	78	79	79	80
Power Consumption	3500	4000	4500	5500
Unit Weight	80 Kg (176lbs)			
Dimensions (L x W x H)	39.00" x 18.50" x 12.10" (99.00 x 47.00 x 30.70 cm)			

### Transmit Path

L-Band Input		RF Output	
Frequency range	950-1525 MHz	Frequency range (Non-inverting)	5.850 – 6.425 GHz 6.425 – 6.725 GHz 6.725 – 7.025 GHz
Input Connector	Type N female	Output connector	CPR 137G
Input Return Loss	18 dB / 50 Ω	Output Return Loss	20 dB
Gain Specification		Spurious	-55 dBc max at rated power
Gain control range	20 dB (0.1 dB step size)	Third order IMD (2 tones 5 MHz apart)	-26 dBc max at 3dB total back-off from rated P1dB
Gain flatness	±2 dB max	Noise Power Density	-70 dBm/Hz max in TX band
Gain stability	3.0 dB p-p max over temp. range		-155 dBm/Hz max in 3.4 – 4.2 GHz

### Receive Path

RF Input		LNB Parameters	
RF Input Frequency	3.4 – 4.2 GHz 4.2 – 4.5 GHz (CI)	LNB type	Phase lock to 10 MHz ref. (from Transceiver via coax. cable)
RF Input Interface	CPR-229G	Noise Temperature	25°K
Input VSWR	2.5:1	L-band Output Frequency	950-1750 MHz
L-band Output		L-band Output Interface	Type N female 50 Ω
Frequency range	+5 dBm	Conversion Gain	60 dB
Output P1dB min	Type N female / 50 Ω	DC power	12÷18V DC (via coaxial cable)
Output Connector	18 dB/ 50 Ω		
Output Return Loss		LNA Parameters (optional)	
Gain Specification		Noise Temperature	35°K (30°K optional)
Gain (LNB + Receiver)	80 dB @ max gain set	Output Interface	Type N female 50 Ω
Gain control range	20 dB (0.1 dB step size)	Gain	60 dB
Gain flatness	±2.5 dB max over full RF band	DC power	12÷18V DC (via coaxial cable)
Gain stability	3.0 dB max over temp. range		
Spurious	-55 dBc max		
Image Rejection	50 dB		

### Common Parameters (Tx & Rx)

Frequency Stability		Environmental	
-40°C to +55°C	±2 x 10 <sup>-8</sup>	Cooling	Forced Air
Aging	±1 x 10 <sup>-7</sup> /year	Operational	-30°C to +55°C standard (-40°C to +55°C option)
Phase Noise		Storage	-55°C to +85°C
(With internal 10MHz reference)		Humidity	Up to 100% condensing
Offset frequency	Phase noise (max)	Altitude	3,000 m AMSL (derated 2°C/300m)
100 Hz	-60 dBc/Hz -65 dBc/Hz typical		
1000 Hz	-70 dBc/Hz -73 dBc/Hz typical	Power Requirements	
10 KHz	-80 dBc/Hz -85 dBc/Hz typical	AC input voltage	Auto ranging 110/220±15% (47-63 Hz)
100 KHz	-90 dBc/Hz -95 dBc/Hz typical		
Monitor & Control		AC Connector	MS3102R20-19P
Serial port (RS-485)	MS3112E10-6P	Mechanical	
Serial port (RS-232)	MS3112E10-6P	Packaging	Weatherproof for outdoor use
Redundancy Port	MS3112E16-26P		
Discrete Port	MS3112E12-10P		

#### NORTH AMERICA

USA  
Tel: +1 678 889-1831  
Fax: +1 678 889-1756  
info.usa@advantechwireless.com

#### CANADA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

#### EUROPE

UNITED KINGDOM  
Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

#### RUSSIA & CIS

Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

#### SOUTH AMERICA

USA  
Tel: +1 678 889-1831  
Fax: +1 678 889-1756  
info.latam@advantechwireless.com

#### BRAZIL

Tel: +55 11 3054 5701  
Fax: +55 11 3054 5701  
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-AWMT5000-LC-600-1000-12106