




600W to 1250W  
ARMA-5000S® series



## Features

- High gain and linearity
- Output power up to 1250W
- Gain adjustment (Local & Remote)
- Remote Monitor & Control (Local & Remote)
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- Power factor correction
- CE Marking

## Overview

The ARMA-5000S® series are the rack-mount solid-state power amplifiers (SSPAs), operating in S-Band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for indoor operation, the amplifiers are of compact size and occupy nine rack-mounting spaces (9 RU - 15¾") of a standard 19-inch rack. Built-in microprocessor controller provides capability for serial port interfaces (RS485) for remote monitoring and control.


Advantech's SSPAs set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

## Application

The featured SSPAs are designed for S-Band satellite up-link applications. They are designed for 19-inch rack mounting in a protected environment. The ARMA-S series are available in output power from 50W to 1250W. For higher power Advantech provides phase-combined systems. Other SSPAs are available for operation at other satellite frequency bands. With all the features of the ARMA-S, Advantech also offers a built-in converter.

## Redundancy

With the addition of the appropriate waveguide and switch kit, the ARMA-5000S® amplifiers can be easily converted for the operation in 1:1 redundant configuration without the use of any external controller. Full remote Monitor and Control of the redundant system is accessible via the serial port (RS-485).

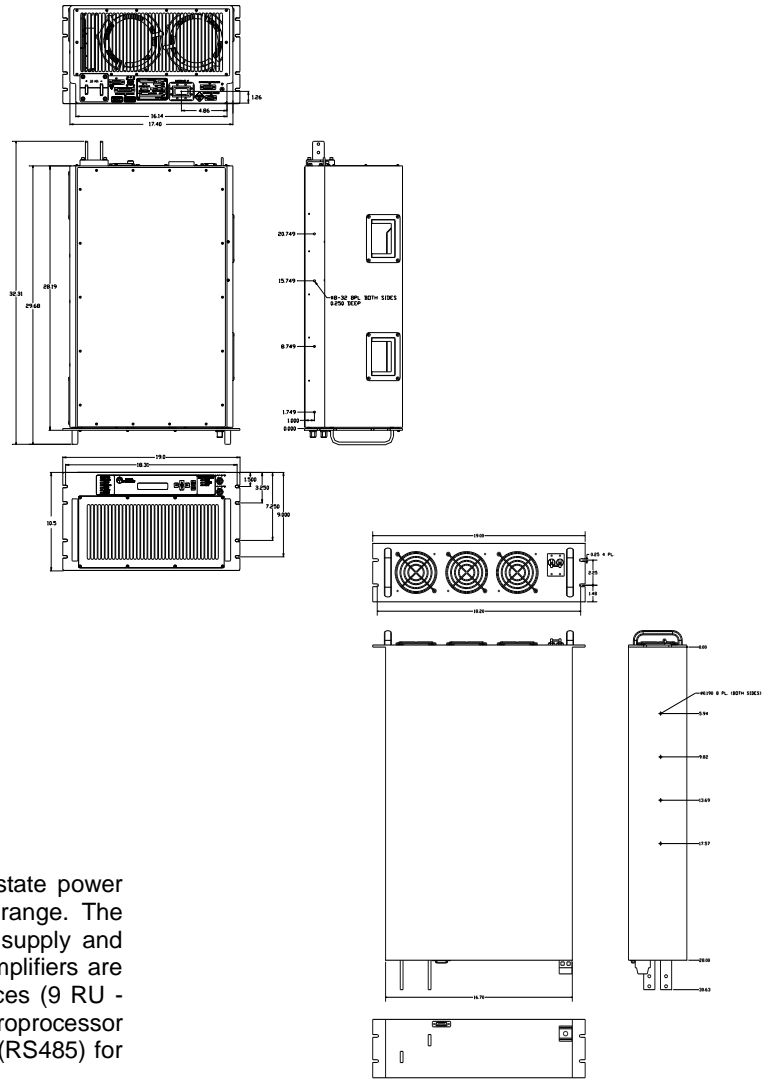

**Table A**

Band	RF Band (GHz)	Output Power (W)
S	2.025 - 2.120	500 - 1000

## Options

- Integrated Block Up Converter
- RF input sample port
- Redundant system

## Accessories

- Redundancy Kit
- Shelf slides
- Band pass filter
- Remote M&C panel (Ethernet port optional)

# S-Band Rack-mount SSPA



Technical Specifications	600W	700W	800W	1000W	1250W
<b>Electrical Characteristics</b>					
Availability in this series					
S	√	√	√	√	√
Output power (P <sub>SAT</sub> )	+58 dBm	+58.5 dBm	+59 dBm	+60 dBm	+61 dBm
Output power (P <sub>1dB</sub> ) min	+57 dBm	+57.5	+58 dBm	+59 dBm	+60 dBm
Gain at maximum setting	70 dB min				
Frequency range	2.025 - 2.120 GHz				
Gain adjustment range	20 dB				
Max input power without damage	+10 dBm				
Gain flatness	1.5 dB p-p max over full band 0.5 dB p-p over 10 MHz at 25°C				
Gain slope	0.06 dB/MHz, max				
Gain variation over temperature	±1.5 dB over full operating range (temperature compensation mode)				
Gain variation over 24 hours	±0.5 dB max at constant temperature & drive level				
Input VSWR	1.3: 1				
Output VSWR	1.3: 1				
Noise Power Density	-90 dBm/Hz max in TX band				
Spurious at rated power	-65 dBc max				
Harmonics at rated power	-45 dBc max				
AM/PM conversion	3.5°/dB max at P <sub>1dB</sub> 1°/dB max at 3 dB total back-off from rated P <sub>1dB</sub>				
Third order IMD (two equal tones 5 MHz apart)	-24 dBc max at 3 dB total back-off from rated P <sub>1dB</sub>				
Group Delay	Linear: 0.02 nsec/MHz max. Parabolic: 0.003 nsec/MHz <sup>2</sup> max. Ripple: 1 nsec p-p max.				
Residual AM (F* - frequency in kHz)	0-10 kHz -45 dBc 10 kHz - 500 kHz -20 (1.25+log F*) dBc 500 kHz - 1 MHz -80 dBc				
<b>Power Requirements</b>					
DC input voltage	180-264 VAC (47-63 Hz)				
Power consumption, (nominal)	2500W	2700W	3000W	3200W	3500W
<b>Mechanical Characteristics</b>					
Dimensions (L x W x H)	9 RU of 19" rack (6 RU amplifier + 3 RU power supply unit)				
Weight	80 kg (176 lbs.)				
Interfaces:	RF input	N-Type (F)	Redundancy	D-sub 25S	Discrete port
	RF output	7-16 DIN (F)	RS-232	D-sub 9S	D-sub 9S
	Output sample port	N-Type (F)	RS-485	D-sub 9S	DC Line 2-pole terminal board
					AC Line IEC 320 inlet
<b>Environmental Conditions</b>					
Temperature	Operating	0°C to +50°C			
	Storage	-55°C to +85°C			
Humidity	5% to 95% non-condensing				
Altitude	10,000' AMSL, derated 2°C/1,000' from AMSL				

## NORTH AMERICA

### USA

Tel: +1 678 889-1831  
Fax: +1 678 889-1756  
info.usa@advantechwireless.com

### CANADA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

## EUROPE

### UNITED KINGDOM

Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

### RUSSIA & CIS

Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

## SOUTH AMERICA

### USA

Tel: +1 678 889-1831  
Fax: +1 678 889-1756  
info.latam@advantechwireless.com

### BRAZIL

Tel: +55 11 3054 5701  
Fax: +55 11 3054 5701  
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-ARMA-S-600-1250-12106