



2W to 12W
AWMT-2000LK® series



Features

- Operating Ku-Band Tx: 14.00 - 14.50 GHz
13.75 - 14.50 GHz (optional)
Rx: 10.95 - 12.75 GHz (sub-bands)
- L-band Tx and Rx interface
- Easy to install and operate
- Compact light weight design
- Weatherproof package
- Phase-locked LNB
- Low phase noise
- Remote Monitor & Control (RS-232/RS-485)
- Relay alarm indicators
- LED status indicators
- Automatic high reflected power protection
- Harmonic Filter
- High stability internal 10MHz reference
- Downloadable PC GUI
- Redundant ready operation

Overview


The **Advantech Wireless** range of transceivers uses the latest technology, thus providing the ultimate in performance and user friendly operation at a very competitive price.

AWMT-2000LK® is a family of hub-mount transceivers operating in the Ku-band from 2W or 12 W. These transceivers are designed for continuous operation in the harshest outdoor environment. The built-in microprocessor controller provides for external monitoring and control of the operating parameters, and for the redundancy control. The LNB is connected to the transceiver with a single coaxial cable. Apart from the LNB, the complete unit is available in a single integrated package. Higher power transceivers are also available in the AWMT-LK® series for up to 150W.

The flexible and comprehensive monitor and control features on the transceiver ensure that it will fit into any network management system architecture. The user-friendly RS-232 interface will provide full set-up and fault monitoring facilities via a PC terminal mode communication or a hand-held terminal. The RS-485 interface will provide functional remote Monitor & Control, using the Graphic User Interface (GUI) or the Monitor & Control Panel.

Application

The AWMT-2000LK® is designed to operate in the Ku-band with L-band interface. The unit is self-contained and is intended for mounting outdoors, close to the OMT of an antenna.

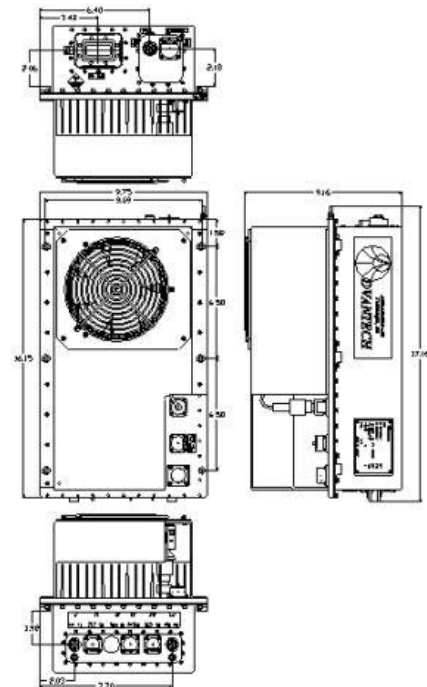

Options

- Extended Ku-band (13.75 – 14.5 GHz)
- LNA operation
- Remote M&C panel (Ethernet port optional)
- External 10 MHz reference with auto sensing

Accessories

- Mounting kits for transceiver installation
- Redundancy kits
- Mounting frame for redundancy applications
- Transmit Reject Filter and/or Receive Reject Filter (external)
- Remote Control Panel
- Hand-Held terminal

Redundancy

The AWMT-2000LK® series of transceivers may be configured to operate in 1:1 redundancy mode. No extra controller is required for redundancy operation, as the built-in controller in each amplifier provides this function. Redundancy kits are required for redundant operation.

Ku-Band Transceiver

L-Band IF Interface



Technical Specifications

Transmit Path					
Model	2W	4W	8W	10W	12W
P1dB min. (dBm)	33	36	38	39	40
Gain min @ max. gain set (dB)	54	57	59	60	61
Power Consumption	60	90	110	130	140
Unit Weight	25 Kg (55 lbs)				
Dimensions (L x W x H)	16.15" x 9.75" x 9.16" (41.02 x 24.77 x 23.27 cm)				
Transmit Path					
L-Band Input		RF Output			
Frequency range	950-1450 MHz	Frequency range	14.00 – 14.50 GHz		
Input Connector	Type N female	(Non-inverting)	13.75 – 14.50 GHz (optional)		
Input Return Loss	18 dB / 50 Ω	Output connector	WR 75		
		Output Return Loss	18 dB		
Gain Specification		Third order IMD (2 tones 5 MHz apart)	-25 dBc max at 3dB total back-off from rated P1dB		
Gain control range	20 dB (0.1 dB step size)	Spurious	-55 dBc max at rated power		
Gain flatness	2.0 dB p-p	Noise Power Density	-70 dBm/Hz max in TX band -145 dBm/Hz max in 10.95 – 12.75 GHz in RX band		
Gain stability	3.0 dB p-p max over temp. range				
Receive Path					
RF Input		Gain Specification			
RF Input Frequency	10.95 – 12.75 GHz	Gain (LNB + Receiver)	75 dB @ max gain set		
	* Field selectable bands	Gain control range	20 dB (0.1 dB step size)		
Bands	1) 10.95 – 11.70 GHz 2) 11.70-12.20 GHz 3) 12.25-12.75 GHz	Gain flatness	±2.5 dB max over full RF band		
		Gain stability	±3.0 dB max over temp. range		
RF Input Interface	WR75	Spurious	-55 dBc max		
Input VSWR	2.5:1 dB	Image Rejection	50 dB		
L-Band Output		LNB Parameters			
Frequency range	950 – 1450 MHz	LNB type	Phase locked to 10 MHz ref. (from Transceiver via coax. cable)		
	950 – 1700 MHz (optional)	Noise Temperature	65°K		
Output P1dB min	+10 dBm	L-band Output Frequency	950-1450 MHz 950 – 1700 MHz (optional)		
Output Connector	Type N female / 50 Ω	L-band Output Interface	Type N female 50 Ω		
Output Return Loss		Conversion Gain	60 dB		
		DC power	12÷18V DC (via coaxial cable)		
Common Parameters (Tx & Rx)		LNA Parameters (optional)			
Frequency Stability		Noise Temperature	85°K		
± 2 x 10 ⁻⁸ over 0°C to +50°C	± 2 x 10 ⁻¹⁰ / day	Output Interface	Type N female 50 Ω		
Aging	± 5 x 10 ⁻⁸ / year	Gain	60 dB		
Phase Noise (With internal 10MHz reference)		DC Power	12÷18V DC (via coaxial cable)		
Offset frequency	Phase noise (max)	Common Parameters (Tx & Rx)			
100 Hz	-63 dBc/Hz	Environmental			
1000 Hz	-73 dBc/Hz	Cooling	Forced Air		
10 KHz	-83 dBc/Hz	Operational	-30°C to +55°C standard (-40°C to +55°C option)		
100 KHz	-93 dBc/Hz	Storage	-55°C to +85°C		
Monitor & Control		Humidity	Up to 100% condensing		
Serial port (RS-485)	MS3112E10-6P	Altitude	3,000 m AMSL (derated 2°C/300m)		
Serial port (RS-232)	MS3112E10-6P	Power Requirements			
Redundancy Port	MS3112E16-26P	AC input voltage	Auto ranging 110/220±15% (47-63 Hz)		
Discrete Port	MS3112E12-10P	AC Connector	MS3102R10SL-3P		
		Mechanical			
		Dimensions	See Table above		
		Packaging	Weatherproof for outdoor use		

NORTH AMERICA
USA
Tel: +1 678 889-1831
Fax: +1 678 889-1756
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 971 59 18
info.russia@advantechwireless.com

SOUTH AMERICA
USA
Tel: +1 678 889-1831
Fax: +1 678 889-1756
info.latam@advantechwireless.com

BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-AWMT2000-LK-2-12-12106