



*Redundant  
FCS501R*



### Features

- Two hot swappable converters in 1U
- 70 MHz or 140 MHz IF
- 125 kHz step size
- Cost effective solution
- L-Band 950 – 2150 MHz
- 1:1 Redundancy included
- Exceeds IESS 308/309 requirements
- High linearity
- Front panel control (local)
- Full remote control (remote) RS485 or RS232

### Overview

The Advantech HP range of converters uses the latest technology in conversion, giving two independent conversion chains in 1 RU package, local and remote control thus providing the ultimate in performance and user friendly operation at a very competitive price.

The spectral purity, low phase noise and stability exceed the requirements of all major international satellite network operators. The hot swappable 1:1 redundancy feature provides for the ultimate flexibility in a very compact package.

The flexible and comprehensive monitor and control features on the HP converter ensure that it will fit into any network management system architecture. The user-friendly front panel or the RS485 remote interface will provide full set-up and fault monitoring facilities. The RS232 will provide the Monitor and Control functions via a PC and will also allow for software downloading.

The converter uses a PLL oscillator either locked to a highly stable internal 10 MHz reference or if the external reference option is fitted and the proper level of signal is present, the PLL oscillator will automatically lock to the external reference.

### Application

The HP range of converters is particularly suited for use in VSAT, SCPC Networks, SNG, DVB-RCS and Hub systems where compact redundancy is required. This makes them an ideal choice for large earth stations requiring cost effective solutions for frequency conversion. The lightweight, rugged and compact design also ensures that the HP converter provides the ideal solution for mobile truck or flyaway DSNG systems. With fully welded aluminum chassis and robust modular internal construction the converter can even meet the demands of military installations. The HP range of converters provides an industry leading MTBF of over 120,000 hours.

### Models

#### **Up-Converters** (non-inverting)


ARUD-70LXR 70MHz to L-Band up-converter

#### **Down-Converters** (non-inverting)

ARDD-LX70R L-Band to 70MHz down-converter

#### **Down-Converters** (inverting)

ARED-LX70R L-Band to 70MHz down-converter

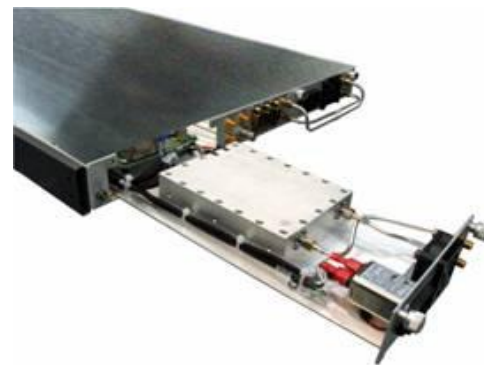

### Options

- 140 MHz IF Frequency
- Ethernet port and SNMP Interface
- Low Group Delay (option)
- External/Internal 10 MHz Reference with Autosensing

# Extended L-Band Synthesized Frequency Converter

## Technical Specifications

Up-Converter		Down-Converter	
<b>IF Input</b>		<b>RF Input</b>	
Frequency range	70 ± 20 MHz 140 ± 40 MHz (optional)	Frequency range	950 – 2150 MHz
Impedance	50 Ω standard (optional 75Ω)	Impedance	50 Ω
Input Connector	BNC (female)	Input Connector	Type N (female)
Return loss	18 dB	Return loss	16 dB
<b>RF Output</b>		<b>IF Output</b>	
Output power (P1dB)	+5 dBm	Frequency range	70 ± 20 MHz 140 ± 40 MHz (optional)
Frequency range	950 – 2150 MHz	Output level	+5 dBm at P1dB
IMD3 (two tone)	-40 dBc max @ -5 dBm output	Output Connector	BNC (female)
Output connector	Type N (female)	Connector Impedance	50 Ω standard (optional 75Ω)
Connector Impedance	50 Ω	Return Loss	18 dB
Return loss	16 dB		
<b>Transfer Characteristics</b>		<b>Transfer Characteristics</b>	
Conversion Gain	20 dB @ max gain setting	Conversion Gain	30 dB min @ max gain setting
Gain adjustment	20 dB (0.1 dB step size)	Gain adjustment	20 dB (0.1 dB step size)
Gain flatness	1.0 dB p-p max. 40 MHz 1.5 dB p-p max. 80 MHz	Gain flatness	1.0 dB p-p max. 40 MHz 1.5 dB p-p max. 80 MHz
Gain stability	±0.25 dB max. /24 hours ±1 dB over temp. range	Gain stability	±0.25 dB max. / 24 hours ±1 dB over temp. range
Spurious	-55 dBc carrier related @ -10 dBm < -60 dBm non-carrier related	Spurious	-55 dBc @ -10 dBm output
Group delay (over 40 MHz)	10 -15 ns p-p	Group delay (over 40 MHz)	10 -15 ns p-p
Group delay (with optional group delay equalizer)	Linear 0.03 ns/MHz Parabolic 0.01 ns/MHz <sup>2</sup> Ripple 1 ns p-p	Group delay (with optional group delay equalizer)	Linear 0.03 ns/MHz Parabolic 0.01 ns/MHz <sup>2</sup> Ripple 1 ns p-p
		Image rejection	50 dB
		Noise Figure	20 dB
Phase noise	Exceeds IESS 308/309	Phase noise	Exceeds IESS 308/309
Synthesizer step size	125k kHz	Synthesizer step size	125 kHz
<b>Reference</b>		<b>Mechanical</b>	
External Reference	10 MHz (optional)	Dimensions	Width 19" (482.6 mm)
Internal reference stability	± 2 x 10 <sup>-10</sup> / day		Height 1U 1.75" (44.5 mm)
Aging	± 5 x 10 <sup>-8</sup> / year		Depth 24" (609.6 mm)
<b>Environmental</b>		<b>Power Supply</b>	
Operational	0°C to +50°C standard	Voltage	90 – 265 VAC (47 – 63 Hz)
Storage	-55°C to +85°C	Power	50W
Humidity	Non-condensing	Connector	IEC 603320 10A
Altitude	3,000m AMSL		
<b>Other options</b>		<b>Monitor and Control</b>	
1) 24V (4A) or 48V (2A) supply to BUC		RS 485	DB9
2) 20V supply to LNB		RS 232	DB9
3) 10 MHz reference for the BUC or LNB		Discrete	DB9
4) Dual, quad, 1:1 redundant in a single shelf (this option is not available with option 1, 2 & 3 above)		Ethernet (optional)	RJ45 F (optional)
5) 10MHz auto-sensing reference			

### NORTH AMERICA USA

Tel: +1 678 889-1831  
Fax: +1 678 889-1756  
info.usa@advantechwireless.com

### CANADA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

### EUROPE UNITED KINGDOM

Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

### RUSSIA & CIS

Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

### SOUTH AMERICA USA

Tel: +1 678 889-1831  
Fax: +1 678 889-1756  
info.latam@advantechwireless.com

### BRAZIL

Tel: +55 11 3054 5701  
Fax: +55 11 3054 5701  
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-FCS501R-Le-12106