



160W to 200W
SSPB 3200-G series




Features

- Full range of output power of 160W, 180W and 200W in a single package
- High linearity
- Redundant ready with no external controller
- Full M&C capability via RS232, RS485 or Ethernet port
- Built-in Forward and Reflected precision power metering
- Output RF calibrated Sample Port
- Redundant Systems shipped fully tested
- Infinite VSWR protection with automatic high reflected power shutdown
- Built-in 70 dB Receive Reject Filter
- Detachable power supply module
- Weatherproof construction
- CE marking

Overview

Based on GaN technology the new G-Series Ku-Band BUCs provide high power density in a compact size. Combined with the traditional Advantech features, these new series of BUCs provide the ultimate in performance and convenience.

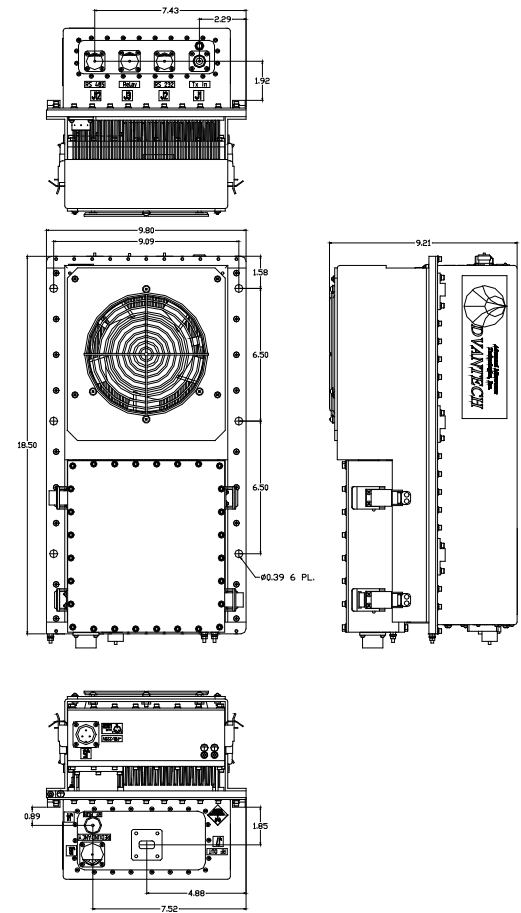

Options

- 1:1 or 1:2 Redundant configuration
- L-Band input (SSPB/BUC operation)
- Internal/External reference with auto-sensing
- Ethernet port

Accessories

- Mounting kits
- External Receive Reject Filter
- Remote M&C panel with optional SNMP
- Handheld terminal
- Flexible and rigid waveguides
- Mounting frames
- High power terminations
- Replacement fans

Ku-Band Hubmount SSPB GaN

General Specifications

		160W	180W	200W
Operating Frequency			KS 14.0 – 14.5 GHz KX 13.75 - 14.5 GHz	
L-Band input (BUC)			KS 950 – 1450 MHz KX 950 – 1700 MHz	
Output Power	P _{SAT} (typical) P _{LINEAR}	+52.0 dBm +49.0 dBm	+52.5 dBm +49.5 dBm	+53.0 dBm +50.0 dBm
Note: For KX, the output power is reduced by 0.5 dB P _{LINEAR} is the power at which the IMD specs are met and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for QPSK/OQPSK/8PSK modulation				
Gain	SSPA SSPB (BUC)	62 ± 3 dB 72 ± 3 dB		
Gain adjustment range		20 dB in 0.1 dB steps		
Gain flatness over full band		SSPA 2dB p-p max	SSPB (BUC) 3 dB p-p max	
Gain slope over 40 MHz		± 0.3 dB max	SSPB (BUC) ± 0.5 dB max	
Gain variation over temperature		± 1.5 dB max		
Input Impedance and VSWR		50 Ω SSPA 1.3:1	SSPB (BUC) 1.4:1	
Output VSWR		1.3:1		
Noise power density		-80 dBm/Hz in Transmit Band, -150 dBm/Hz in Receive Band (10.95 GHz – 12.75 GHz)		
Spurious at P _{LINEAR 1}		SSPA: -65 dBc max	SSPB (BUC): -55 dBc max	
Harmonics		-50 dBc @ P _{LINEAR}		
AM/PM conversion		<2.0°/dB P _{LINEAR}		
Third order IMD (two tones)		-25 dBc two signal 5 MHz apart at P _{LINEAR}		
Group delay		Ripple 1 nsec p-p max over any 40 MHz band		
Residual AM Noise		0 – 10 kHz -45 dBc 10 kHz – 500 kHz -20 (1.25 + log F) dBc 500 kHz – 1 MHz -80 dBc	F = Frequency in kHz	
SSPB (BUC)				
Local Oscillator freq.		KS 13.05 GHz	KX 12.8 GHz	
Internal Reference frequency (optional)		10 MHz	Aging/day ±2 ⁻¹⁰ Aging/year ±5 ⁻⁸ Stability ±2 ⁻⁸ over temp range	
Phase Noise		-53 dBc/Hz at 10Hz -63 dBc/Hz at 100Hz -73 dBc/Hz at 1000Hz	-83 dBc/Hz at 10 kHz -95 dBc/Hz at 100 kHz	
External Reference Frequency phase noise (max)		10 MHz -120 dBc/Hz at 10Hz -135 dBc/Hz at 100Hz -150 dBc/Hz at 1000Hz	-155 dBc/Hz at 10 kHz -160 dBc/Hz at 100 kHz	
Weight & Dimensions				
Dimensions		L x W x H 18.5" x 9.8" x 9.21" (470x254x229 mm)		
Weight		48 lbs (22 kg)		
AC input voltage		90 – 265 VAC (47-63 Hz)		
Power consumption	nominal	850W	900W	950W
Interfaces		Input (RF or L-Band) Output Sample Port RS485/Ethernet	N type female N type female MS3112 type	AC line MS3102 type RF output WR75 Cover
Environmental		Temperature	Operating -30°C to +55 °C Storage -55°C to +85 °C	Option 1 -40°C to +55 °C Option 2 -50°C to +50 °C
		Humidity	100% condensing	
		Altitude	10,000' AMSL, de-rated by 2 °C/1000' from AMSL	

NORTH AMERICA

USA

Tel: +1 678 889-1831
Fax: +1 678 889-1756
info.usa@advantechwireless.com

CANADA

Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM

Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS

Tel: +7 495 971 59 18
info.russia@advantechwireless.com

SOUTH AMERICA

USA

Tel: +1 678 889-1831
Fax: +1 678 889-1756
info.latam@advantechwireless.com

BRAZIL

Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-SSPBg-Ku-160-200-12106